


BOTTOM VIEW
(NO SCALE)

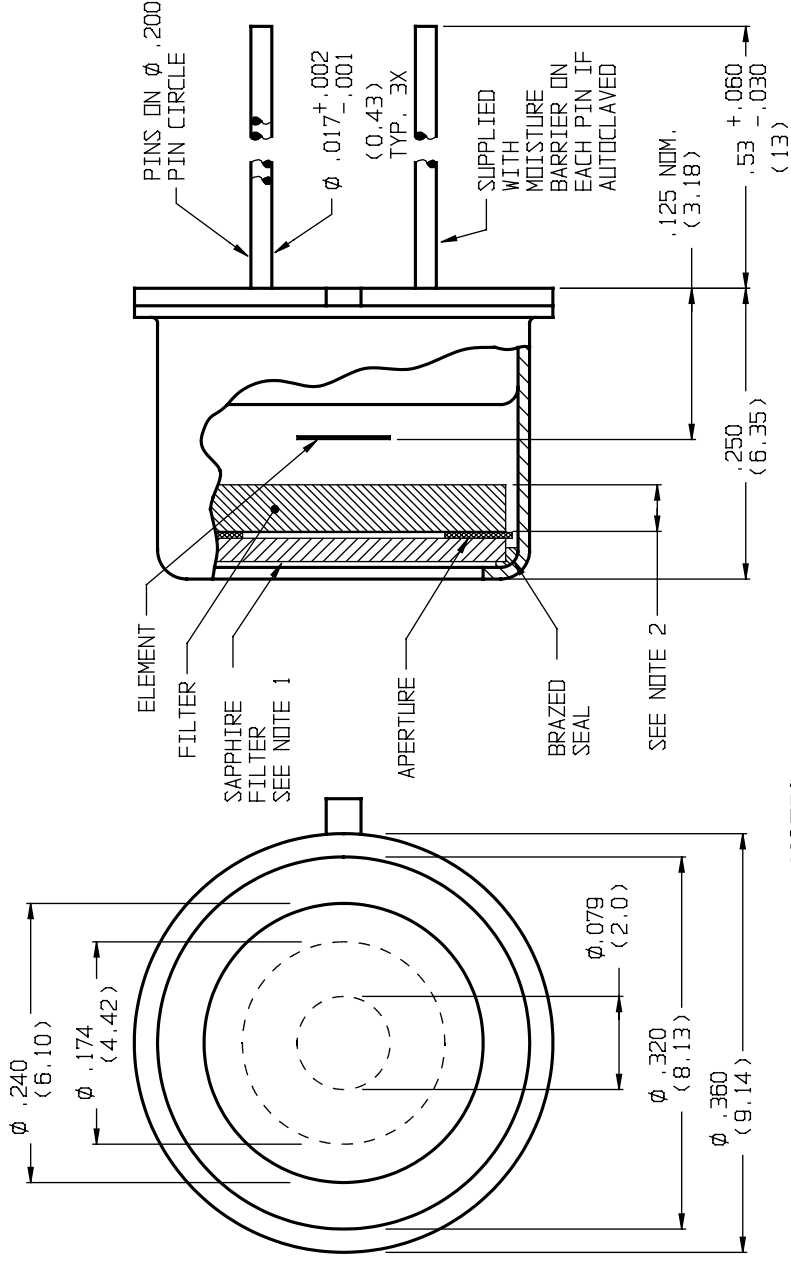

NOTES:

1. SAPPHIRE FILTER AND CAN HAVE BRAZED SEAL.
2. FILTER THICKNESS DEPENDENT ON TYPE, THIS MODEL ACCOMMODATES FILTERS .010 MIN. TO .075 MAX. THICK.
3. OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC SENSITIVE DEVICES.

PIN	DESIGNATION
1	V+
2	OUTPUT
3	CASE/GROUND

NOTICE: ELTEC INSTRUMENTS, INC. CLAIMS PROPRIETARY RIGHTS IN THE INFORMATION DISCLOSED ON THIS DRAWING. IT IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT, IN WHOLE OR IN PART, BE USED TO MANUFACTURE ANYTHING WHETHER OR NOT SHOWN HEREIN, REPRODUCED OR DISCLOSED TO ANYONE WITHOUT DIRECT WRITTEN PERMISSION FROM ELTEC INSTRUMENTS, INC.

REV	ECN	DATE	DESCRIPTION	BLW	DD
A	1866	12-4-06	ADD NOTE ABOUT MOISTURE BARRIERS		
Distribution and Technical Support: Silverlight Ltd., Technoparkstr. 2, CH-8406 Winterthur, Switzerland info@silverlight.ch www.silverlight.ch					
MODEL 406MBN SINGLE ELEMENT PYROELECTRIC IR DETECTOR WITH JFET AMPLIFIER					
				REV.	
				A	A
				SCALE : 6.5/1	SHEET 1 OF 1